DPS-5000e Plus

PC-Based Compact Pre-Pack Scale



Searching for a New Balance

Intuitive Adjustable Display

Tilt and rotate the intuitive 10.1'' capacitive touch screen for maximum productivity and viewing comfort.



Fast and Efficient Printing

The front-loading 300dpi printer uses 80mm wide width label to deliver high-resolution printing while easing label change.

External Platform

Support external S-WR platforms for high precision weighing.

More Features...

Remote diagnostics, email alert, printing graphics on label and receipt, and Help Mode for operators.

Linerless Labeling

Get more prints on a single label roll and enjoy zero liner waste at work. Create label designs of variable lengths with ease to enhance promotional value.



Options


Internal Rewinder Kit

Accommodates batch printing by winding up dispensed labels into a neat roll.



Long Linerless Label Holder

Keep your workplace organised while dispensing continuous label printing.





Auto Linerless Dispenser Kit

Facilitate uninterrupted label printing for optimal efficiency in high-volume packing operations.

Specifications

Capacity	Resolution	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000	e = 5g / 0.01lb	e = 10g
	1 / 6,000	—	e = 5g
	1 / 7,500	e = 2g	—
Capacity	Resolution	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 2 / 5g	e = 5 / 10g

Model		DPS-5000e Plus	
Dimension W x D x H (mm)	DPS-5000e Plus	290 x 432 x 420	
	S-WR Platform	295 x 355 x 55	
	Short Stand (Option)	210 x 369 x 183	
Operator Display		10.1'' TFT WSVGA with Capacitive Touch	
Display Size WxD (Pixels)		1024 x 600	
Display Rotatable Degree		+ / - 30 degree left and right ; 80 degree up and down	
Label / Receipt	Types	Liner	Linerless With Auto-Cutter
	Roll Diameter	Max 125mm	Max 125mm
	Roll Width	Max 80mm	Max 80mm
	Print Width	Max 80mm	Max 80mm
	Printing Speed	Max 150mm / second*	Max 150mm / second*
	Print Resolution	300 dpi	300 dpi
Barcode Type		Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, RSS, PDF417 (For Receipt Only), GS1, QR Code, Datamatrix	
Power Source		AC 100V / 220V (Compliance to 80PLUS Power Saving**)	
Operating Temperature		- 10°C to + 40°C	
Humidity		15% to 85% RH Non-Condensation	
Standard Interface		Ethernet 10 / 100 Base T, 4 x USB 2.0, SD Socket	
Net Weight	DPS-5000e Plus	12 kg	
	S-WR Platform	4.5 kg	
	Short Stand (Option)	3.4 kg	
Options		Wireless LAN IEEE 802.11 a / b / g / n/ ac, Enchant,InfoTag, e.Label with Hi-Touch, Base Station, Internal Rewinder Kit, Long Linerless Label Holder, Short Stand	
Factory Options		Linerless Printer with Auto-Cutter, Auto Linerless Dispenser Kit	


80 PLUS GOLD 80 PLUS SILVER

* To achieve maximum print speed, high sensitivity thermal paper is necessary.
** 100-120Vac Gold (North America, Canada and Japan)
210-240Vac Silver (European, UK and most of Asia)

Model Variations

- DP-5000e Plus Printer
- DI-5000e Plus Indicator

External Dimensions (mm)

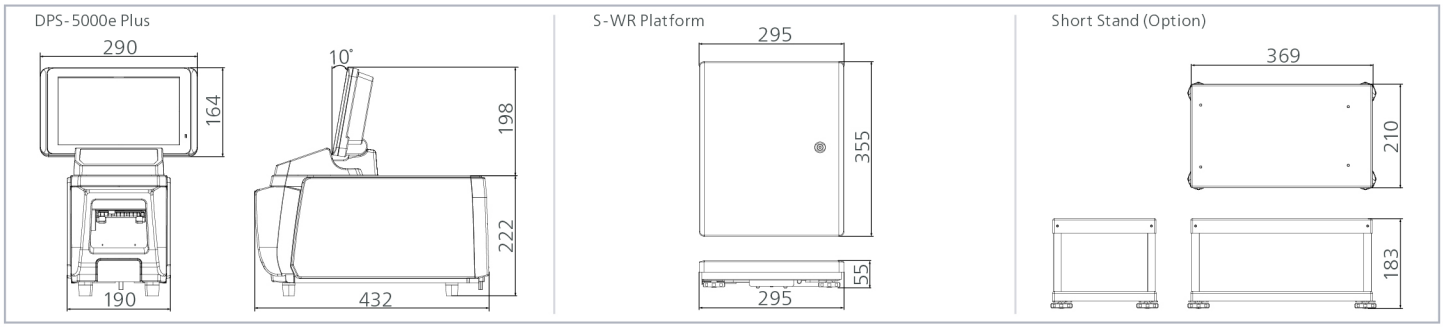

- Specifications are subject to change without prior notice

Sedex Member

DIGI SINGAPORE Pte. Ltd.
4 Leng Kee Road #05-02/03/04/05/11/12
SIS Building SINGAPORE 159088
TEL :+65 6472 2996
SALES:+65 6378 5387
FAX :+65 6863 4614
URL :www.digisystem.com/sg/
E-MAIL : customer_support@sg.digi-group.com

TERAOKA SEIKO CO.,LTD.
13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-5562
URL: www.digisystem.com