
External Dimensions (mm)

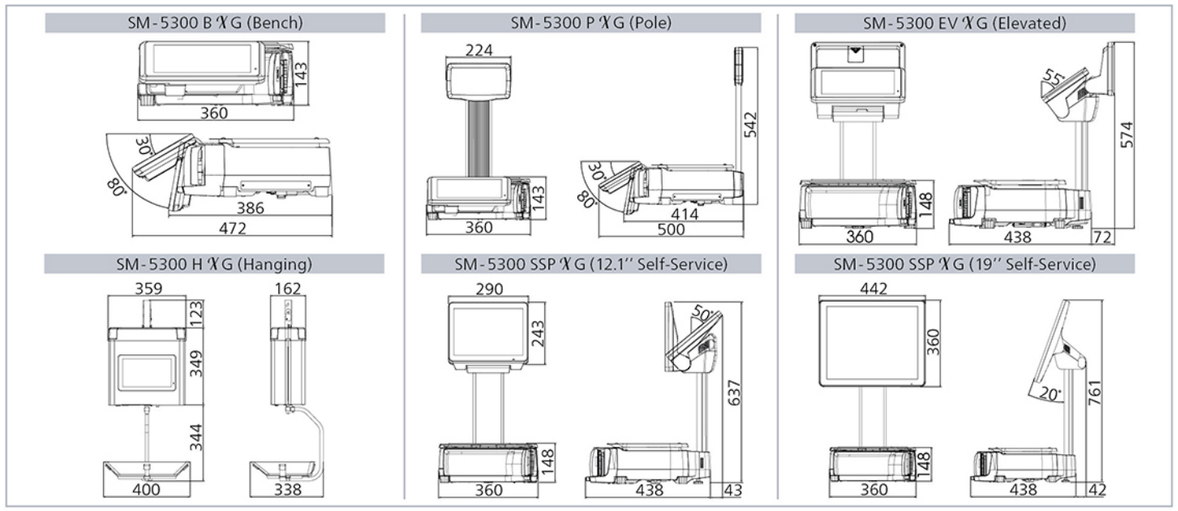

Specifications

Capacity		Max 6kg[2]	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000	e = 2g	e = 5g / 0.01lb	e = 10g
	1 / 6,000 or 1 / 7,500	e = 1g	e = 2g	e = 5g
Capacity		Max 3 / 6kg[2]	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model		SM-5300 B 'X' G Bench	SM-5300 P 'X' G Pole	SM-5300 EV 'X' G Elevated	SM-5300 H 'X' G Hanging	SM-5300 SSP 'X' G 12.1'' Self-Service	SM-5300 SSP 'X' G 19'' Self-Service
Dimension	W×D×H(mm)	360 x 472 x 143	360 x 500 x 542	360 x 510 x 574	400 x 338 x 816	360 x 481 x 637	442 x 480 x 761
Operator Display	10.1" WSVGA with Capacitive Touchscreen (1024 x 600)	○	○	○	○	–	–
	12.1" TFT SVGA with Capacitive Touchscreen (800 x 600)	–	–	–	–	○	–
	19" TFT SXGA with Capacitive Touchscreen (1280 x 1024)	–	–	–	–	–	○
Customer Display	7" WVGA (800 x 480)	○	○	–	–	–	–
	10.1" WVGA (1024 x 600)	–	–	○	○	–	–
Display Resolution		1 / 3,000, 1 / 6,000 & 1 / 7,500					
Label / Receipt	Types	Liner			Linerless With Auto-Cutter		
	Roll Diameter	Max 125mm except Hanging 105mm			Max 95mm		
	Roll Width	Max 71mm except Hanging 63mm			Max 62mm		
	Print Width	Max 60mm except Hanging 61mm			Max 61mm		
	Printing Speed	Up to 150mm / second[1]			Up to 150mm / second[1]		
	Print Resolution	300 dpi			300 dpi		
Power Source		AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60 Hz) Auto Switch					
Operating Temperature		-10°C to +40°C					
Humidity		15% to 85% RH Non-Condensation					
Standard Interface		Ethernet 10 / 100 Base T, 4 x USB 2.0, 1 x RJ11					
Net Weight		10.7 kg	11.7 kg	13.2 kg	14.0 kg	13.3 kg	17.0 kg

Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, Base Station, e.Label with Hi-Touch, InfoTag, Queue Printer, Speed ID, Enchant
Factory Option	Linerless Printer with Auto-Cutter

[1] To achieve maximum print speed, high sensitivity thermal paper is necessary.
[2] Configuration is not applicable to hanging variant.

Console variant is available.

• Specifications are subject to change without prior notice

Sedex Member

DIGI SINGAPORE PTE. LTD.
4 Leng Kee Road #05-02 / 03 / 04 / 05 / 11 / 12
SIS Building SINGAPORE 159088
TEL : +65 6472 2996
SALES: +65 6378 5387
FAX : +65 6863 4614
URL : www.digisystem.com/sg/
E-MAIL : customer_support@sg.digi-group.com

TERAOKA SEIKO Co., Ltd.
13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-5562
URL: www.digisystem.com

SM-5300 X G / D / 0426S

SM-5300 'X' G

PC Based System Scale Printer



Searching for a New Balance

SM-5300 XG designed to Xcite, crafted to Xcel



Xplore new solutions

Xtensive range




DIGIweb enables remote management of scale data and label design in real-time. Scale and printer status can be monitored at a glance with its dashboard overview. This cloud-based service also provides remote access to sales reports and other remote services such as network wide configuration and software updates.

- Remote operation eliminates unnecessary physical interactions
- Reduce downtime and increase productivity



Speed ID taps on RFID technology for a contactless user login to the scale while keeping the scale safe from unauthorised usage. Its touchless nature helps to safeguard the workplace by limiting physical contact amongst operators.

- Available in 2 variants: tag or wristband
- Built-in clerk log report allows contact tracing and reduces shrinkage



Tag

Wristband



Envision the future of retail with DIGI's revolutionary Shelf Edge and Digital Signage Display.

Enchant benefits

- In-store advertising platform
- Vivid HD display
- Support dynamic video and image content

More Info Here



InfoTag is an enterprise-grade electronic shelf label that grants pricing automation via wireless updates. Its QR code and NFC - Near Field Communication capabilities make product information readily available to customers via their mobile devices.

- Ensures social distancing with remote price update
- Promote product and speed up order picking with LED flash indicator
- Low temperature variant available for freezer environment



e.Label combines a high definition e-Paper display with the tap-activated Hi-Touch feature to achieve maximum readability and fast PLU call-up. Designed for wet environments, the IP67-certified electronic labels are water-resistant and washable to help retailers maintain high hygiene standards.

- Reduce in-store physical interactions with remote price updates
- Hi-Touch delivers error-free automatic PLU call-up to boost operational efficiency
- Available in 2 sizes (2.7"& 4.2")

maXimised value



DIGI's waste management solution accurately tracks and measures wastage by capturing its data according to type, quantity or reason and location of disposal.

- Improve procurement planning and profitability by drawing insights from analysis report
- Identify near-expiry products for markdowns

Next-Generation User Interface

SM-5300 X G features a new user interface that maximises screen usage, displaying only the necessary function keys related to each specific mode. When combined with the capacitive touchscreen, navigation is seamless and easy for every user.

- Favourites ★ Tab
- Swipe Gestures
- Mode-Specific Function Keys



Interactive Customer Displays

Native video playback capability offers an additional avenue to showcase promotional contents that can strengthen in-store marketing efforts and boost customer engagement.

- Support dynamic advertisements
- Enable upsell and cross-sell

Xceptional performance





With no backing paper and twice as many label prints on a single label roll, this sustainable solution helps businesses to maximise inventory space while reducing logistic costs.

- Quick and easy roll replacement
- Flexible label design
- Crisp and appealing label presentation